



EM921

Conventional Manual Call Point

Features and Benefits

EN54-11:2001 Compliance
 LPCB Approved
 Surface or Semi-Flush mounted (according to the mounting base)
 Compatible with latest EN standards
 Optional Flip cover for extra protection
 High visibility LED indicator
 Resettable MCP
 Optional back box for surface mount
 Flashing LED indicator
 Easy to install

Overview



The Manual Call Point from Everyday is designed for the use of raising an alarm manually once verification of a fire or emergency condition has been occurred through pressing the resettable glass. Manufactured in accordance with EN 54 part 11, European Standard and constructed of high impact red ABS with smart design, easy to install and maintenance. The unit is supplied with special key for resetting. To reduce interference and power consumption, pulsed circuits are used to increase the life of the emitting lens.

Technical Specification

Listed	LPCB / CE
Certified	EN54-11:2001
Power Rating	
Input Voltage	35VDC
Current Consumption	Standby 65µA, Alarm: 2mA
Call Point	
Reset Tool	Supplied
Protection	Optional flip cover
Indicator	Single Rd LED
Material / Colour	ABS Plastic / Red

Dimension	85 x 85 x 38 mm
Weight	-
Operating Temperature	-10°C to +55°C
Humidity	0 to 95% Relative Humidity, Non condensing

Technical Specification

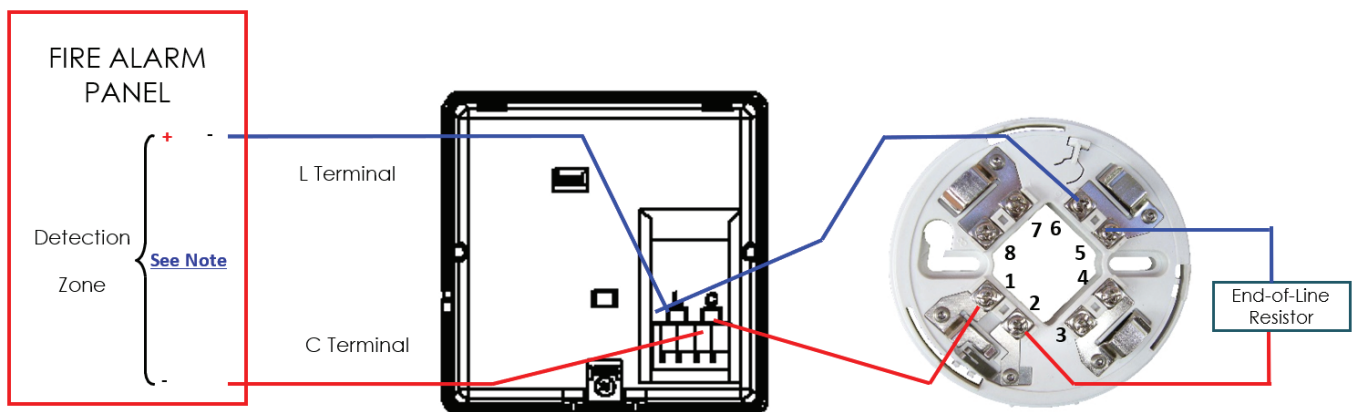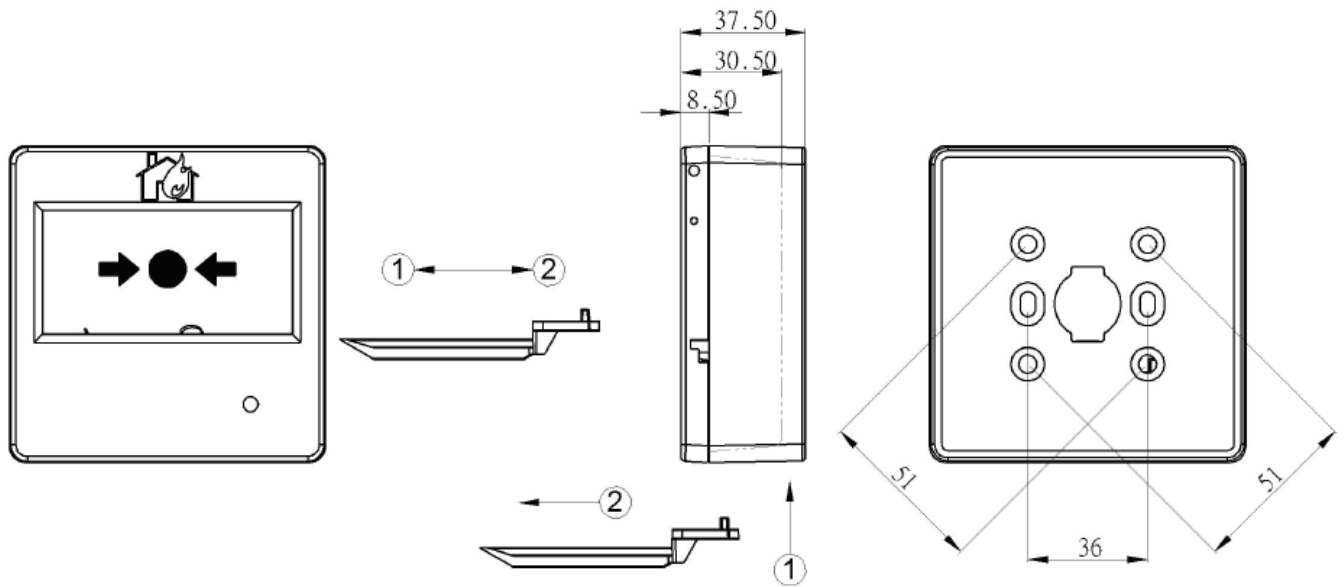

Note : Please refers to the Installation manual.